WHERE THE FOREST MEETS THE PRAIRIE

Todd County

MINNESOTA • EST. 1855

BOARD OF COMMISSIONERS

Work Session Agenda

Tuesday, December 1, 2026 — 10:00 AM

or immediately following the regular board meeting

Meeting to be held in the County Board Room
at the Historic Courthouse, 215 1st Ave S, Long Prairie, MN.

MEETING WILL BE LIVE-STREAMED AT: HTTPS://WWW.TODDCOUNTYMN.GOV

Agenda Item #		***Agenda Time:***
1	**The City of Long Prairie and Bolton & Mend to provide an update on the MPCA/Central** ***Candace Bruder, City Administratior & Kent Louwagie, Bolton & Menk***	10:00
2	**CD4 Drainage Inspection Report** ***Nancy Uhlenkamp, Ditch/Ag Inspector***	10:15

Commissioners may be in the Commissioner's Board Room prior to the board meeting proceedings.
The County Board will open the meeting at the posted time and reserves the right to alter the agenda schedule for business needs.

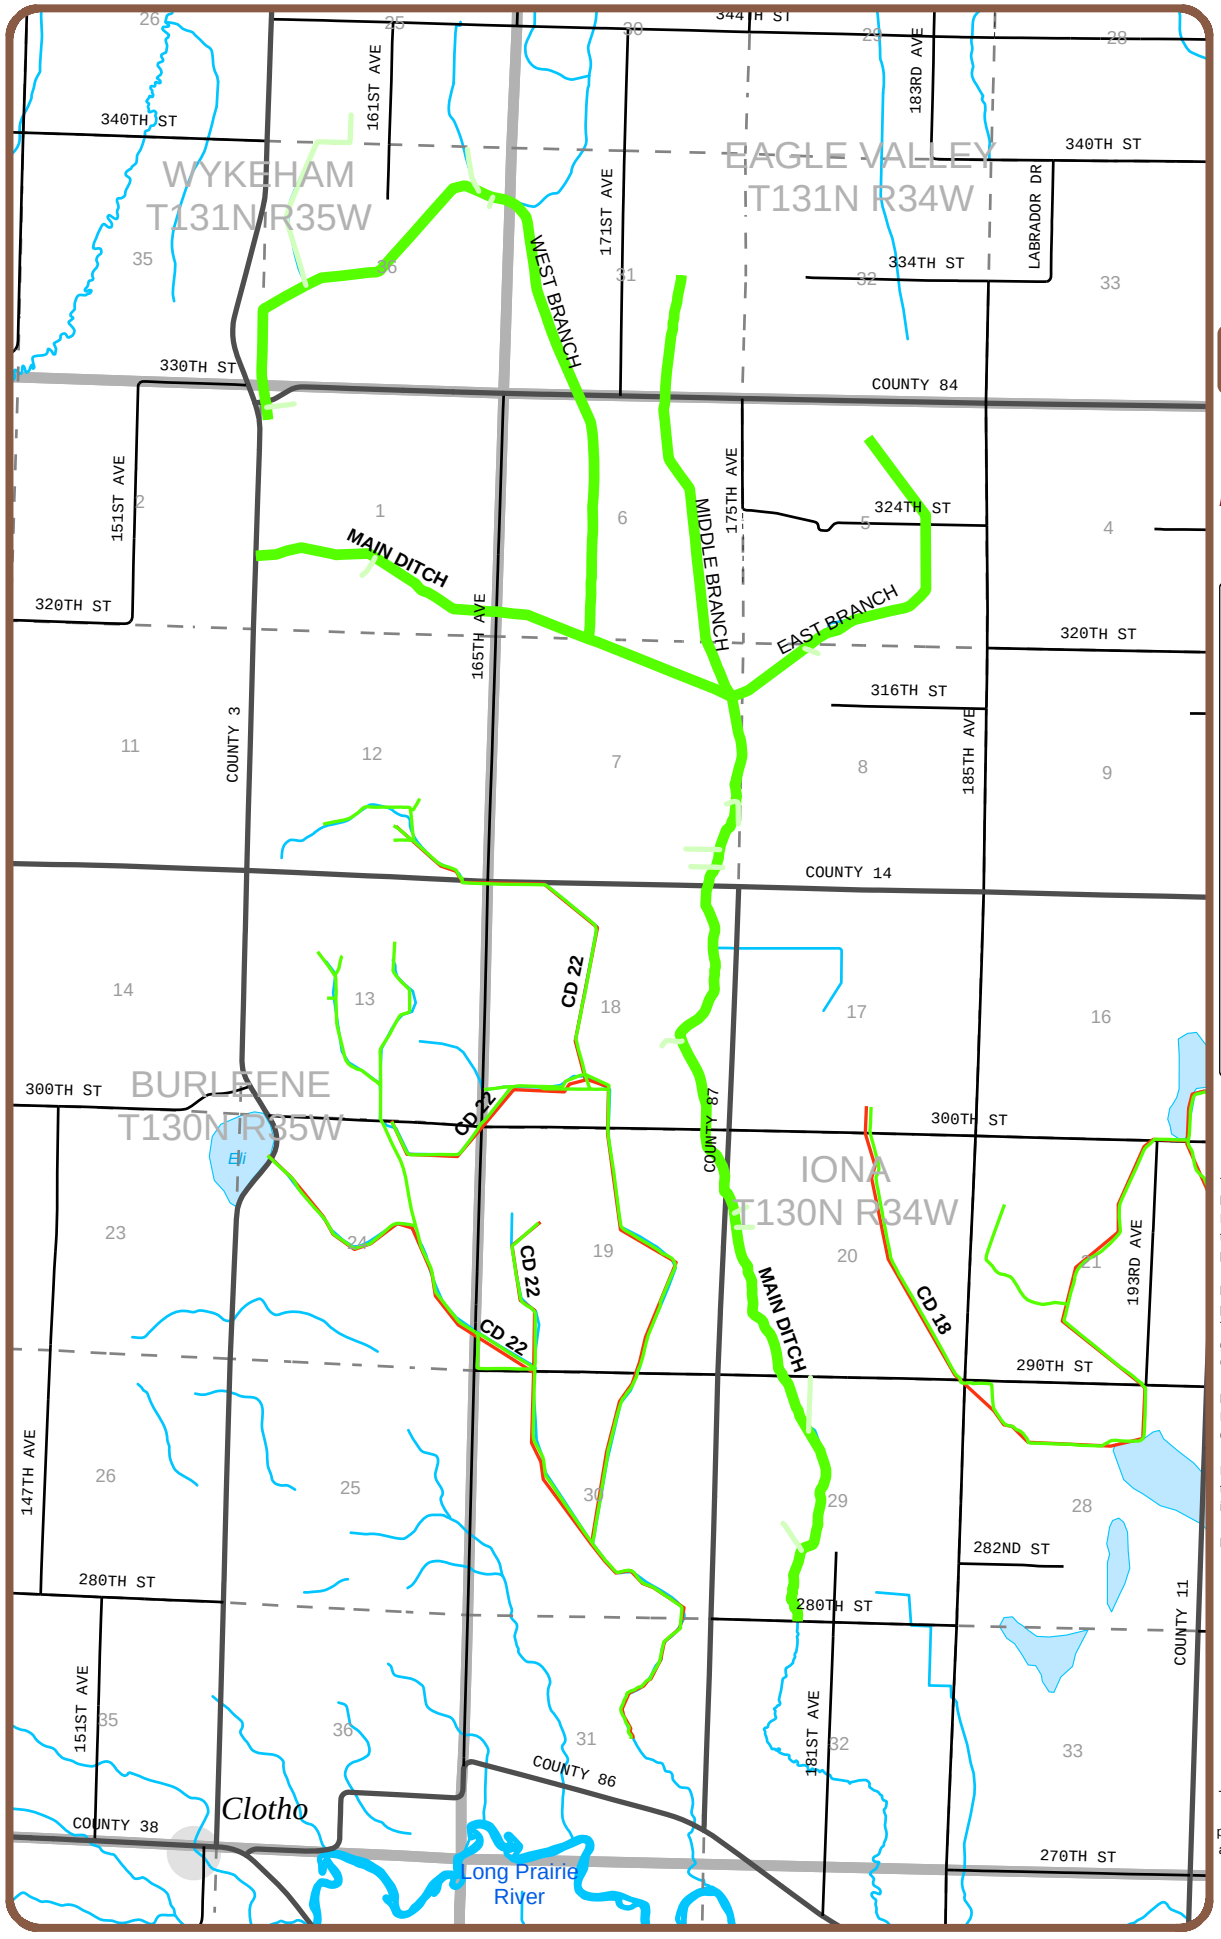

TODD COUNTY PUBLIC DITCHES

COUNTY DITCH 4

Map is to be used as a reference for the general locations of public ditches in Todd County. Not to be used as a legal document.

Legend

asBuilt
- APPROVED
- ABANDONED
- REROUTED
- PRIVATE

Design
- APPROVED
- ABANDONED
- Major Highways
- County Roads
- Township Roads
- Municipal
- Private
- Minimum Maintenance
- Section Line
- Lakes / Wetlands
- Rivers / Streams

Boundaries
- City
- Township

1:50,000

0 0.25 0.5 0.75 Miles

This map represents the approximate location of the Todd County Public Ditches based on interpretation of the original ditch maps and aerial photos from various years.

Ditches as built: Based on aerial photos from 1939, 1992, and 2008. The original profiles were used as a guide. Drawn by the Todd County GIS & Land Services Department.

Ditches from design: County Ditch 4 no longer has the original design map.

Map is to be used as a reference for the general locations of public ditches in Todd County.

Not to be used as a legal document.

TODD COUNTY
WHERE THE FOREST MEETS THE PRAIRIE
EST. 1855

The Todd County GIS & Land Services Department has made every effort to provide the most up-to-date information available in this publication and cannot be held responsible for any unforseen errors or omissions.

August 2011

TODD COUNTY DRAINAGE INSPECTOR'S REPORT
(MN Statute 103E.065)

DITCH SYSTEM:	**CD 4**
CONTACT OR PERSON REQUESTING THE REPAIR:	Jeremy Reed contacted me regarding slow drainage on the Main Ditch south of County Road 14.
DATE OF CONTACT:	July 2026
LOCATION:	Main Ditch between County Road 14 and 300th Street, just west of County 87 
PROBLEM:	After July 4, 2026 rain event the water is taking a long time to recede.

TODD COUNTY DRAINAGE INSPECTOR'S REPORT
(MN Statute 103E.065)

LOCATION:	Main Ditch on parcel 13-0017900. 
PROBLEM:	August 2026 - Made a site visit. The southern part of the ditch was completely dry. The north property line part of ditch line was too wet to walk. Drone flight done on September 30, 2026. It took a couple of weeks to get the flash drive. Photo below is from the drone flight. 

TODD COUNTY DRAINAGE INSPECTOR'S REPORT
(MN Statute 103E.065)

FINDINGS AND ACTION:	Footage was reviewed. Beaver dams cannot be seen, there just looks to be a large amount of vegetation/silt that is holding water back. Water flow can be seen, but it is draining very slowly. The soil type for this section of ditch is 514 Tacoosh mucky peat. This soil type is typically 30 inches of mucky peat with about 60 inches of sandy loam beneath that. Some areas may have Rifle muck soils which is peat to 51 inches deep. There is approximately 1,300 feet of this soil type on parcel 13-0017900 where the blockages are. The total length of ditch on this parcel is approximately 3,000 feet. The County Ditch Inspector will get an estimate to clean the 1,300 feet of ditch line that is on the muck soils, and will bring this to a future Board Meeting.

TODD COUNTY DRAINAGE INSPECTOR'S REPORT
(MN Statute 103E.065)

	COST TO REPAIR:		
SIGNATURE:	Nancy Uhlenkamp CDI Nancy Uhlenkamp		
DATE PRESENTED TO COUNTY BOARD:	12/1/2026 Work session	**DATE OF BOARD ACTION:**	
CONTRACTOR NAME AND ADDRESS:			
COST: **CONTRACT OR PER HOUR**			
COMPLETION DATE:			